


RC_Y6 Frame

- The load current is up to 120A.
- Provide 6 channels ESC Signal and power distribution.
- Provide camera AV signal transfer to the image transmitter..
- With 2 way DC-DC circuit. The 12V 2A output providing 5 output connectors. The 5V 3A output providing 6 output connectors.
- With the battery voltage detection, display and low voltage alarm function.
- The onboard LED lights, normal working state for the breathing light effect,and flashing for low power alarm.

Connection diagrams

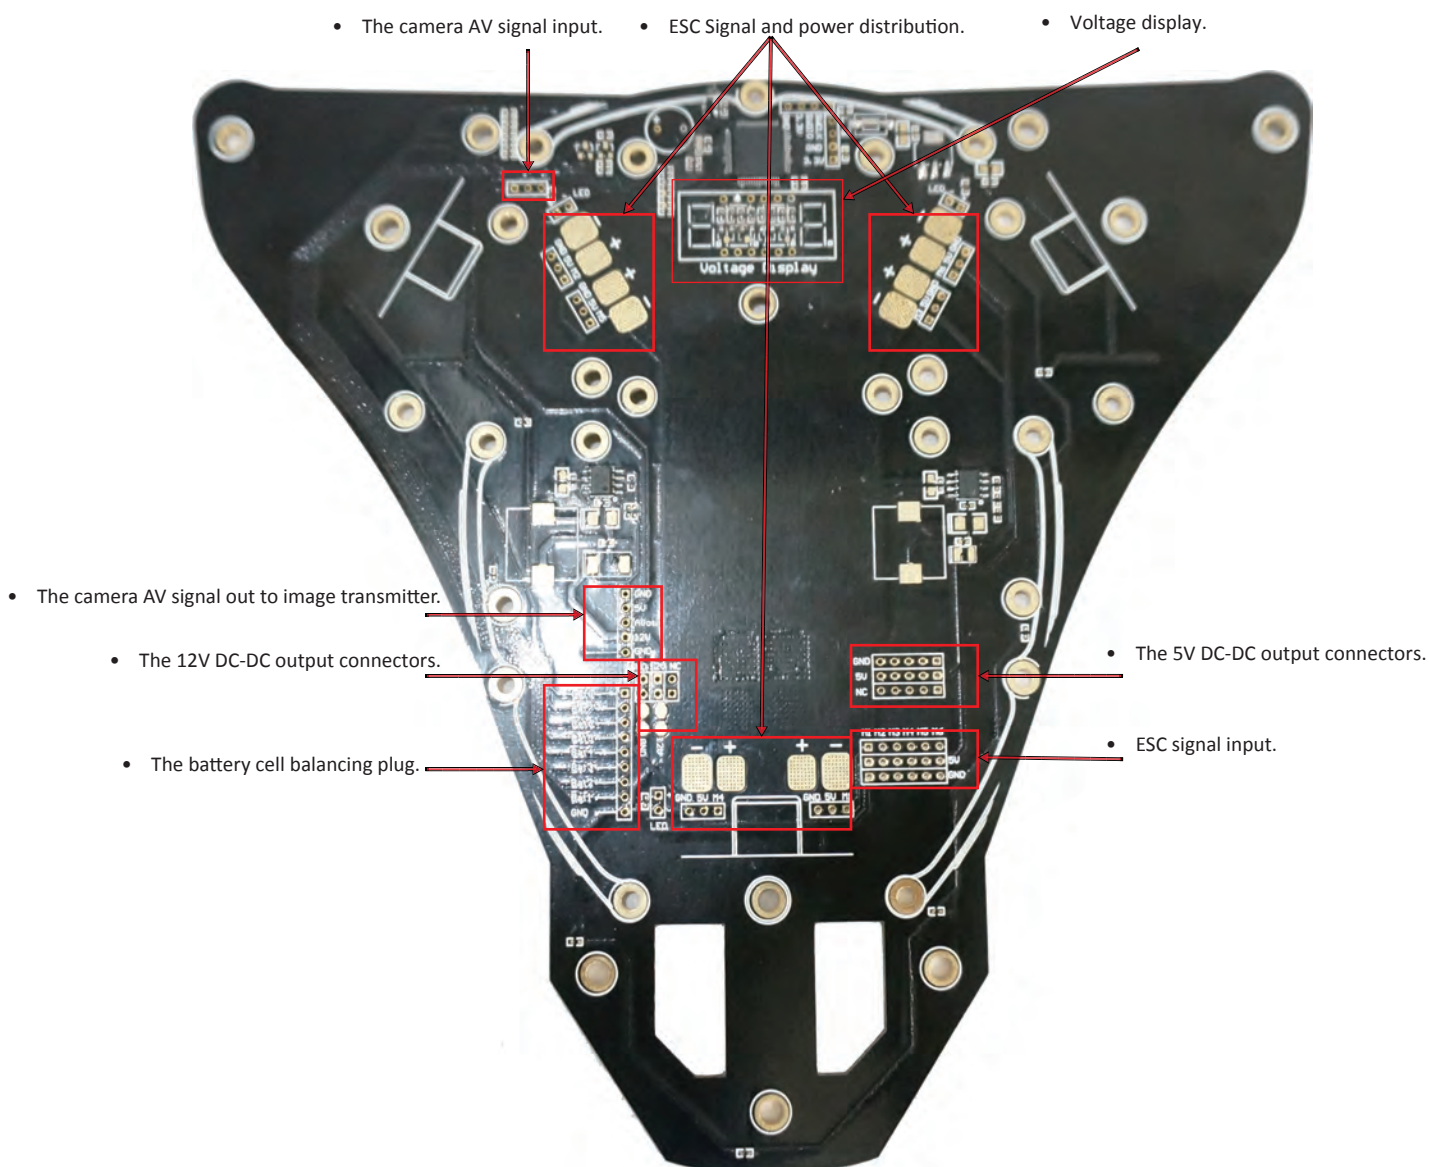

Suggestions:

- If you want to use the built-in battery low alarm functions, you must first connect the battery balanced plug, connected with the main power again. Otherwise the voltage detection may not be accurate.
- It is best to use anti spark plug for battery.